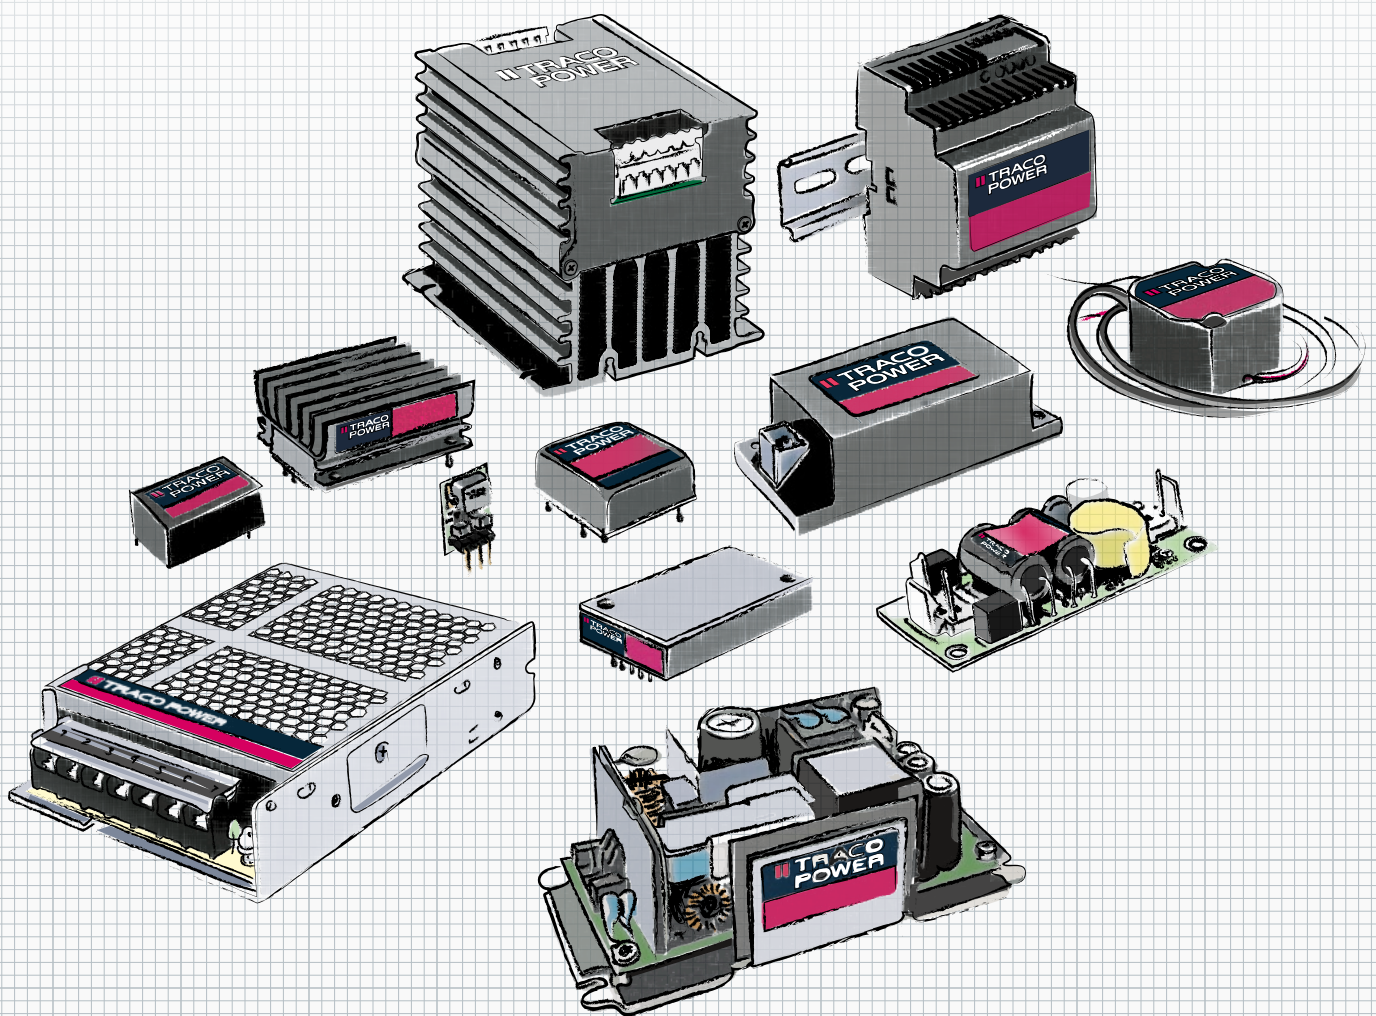




# 2025 | DC/DC Converters AC/DC Power Supplies Product Portfolio



## Company Profile

TRACO Electronic AG is a Swiss company with headquarters based in Baar, Switzerland. As a leading power supply specialist with more than 40 years experience we are dedicated to the design and manufacturing of high quality DC/DC and AC/DC power conversion products.

TRACO markets its products worldwide under the registered trademark TRACO POWER. Our mission is to provide our customers with optimal power supply solutions in terms of performance, quality and cost for their individual application.

## Product Range

TRACO POWER's product range focuses on the four **vertical markets**:

**Industrial, Medical & Healthcare, Railway / Ruggedized and Building Technology & Household.**

Within these markets TRACO offers one of the most comprehensive programs for standard products in application areas such as:

Test & Measurement, Automation & Control, Robotics, Machinery, Therapy, Diagnostic, Laboratory, Home & Office Automation, White Goods, Transportation, Construction & Farming, Information Technology, Smartgrid, Renewable Energy, Oil & Gas.

Detailed product data can be downloaded from our website: [www.tracopower.com](http://www.tracopower.com)

## Icons used throughout the catalog



### High isolation products for medical applications

- Product certification according to IEC/EN/ES 60601-1 3<sup>rd</sup> edition for 2 × MOPP
- EMC emission according to IEC 60601-1-2 ed. 4
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Design and production according to ISO 13485 quality management system
- 5-year product warranty



### Ruggedized DC/DC converters for railway applications

- Approved to EN 50155 for electronic equipment used on rolling stock
- Shock and vibration test according EN 61373
- Qualification for the fire behavior of components according to EN 45545-2

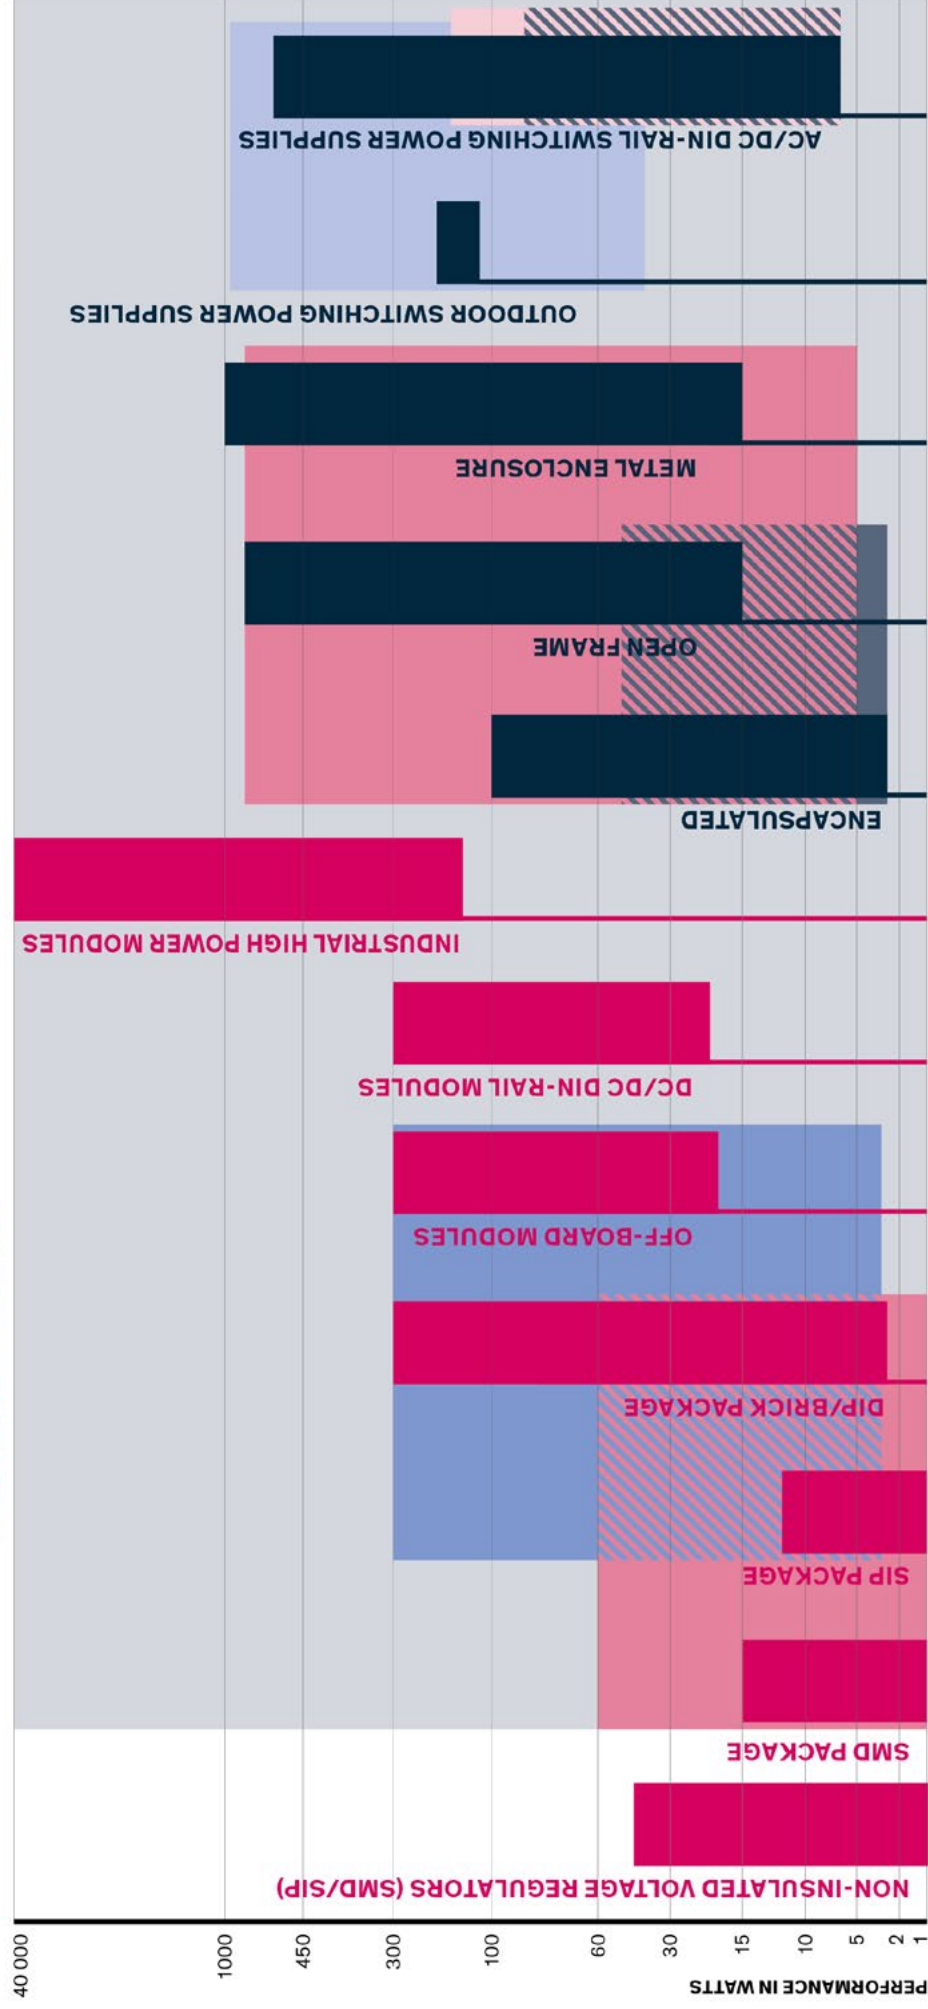


### Building Technology / Household

- Product certification according to IEC/EN 60335-1

## DC/DC CONVERTER

## AC/DC & DIN RAIL



## SPECIAL APPROVALS/TARGET MARKETS

MEDICAL TECHNOLOGY

INDUSTRY/ICT

RAILWAY AND TRANSPORT

HOUSEHOLD

HARSH ENVIRONMENT ATEX

BUILDING TECHNOLOGY

## Index

### DC/DC Converters

Non-Isolated Step Down DC/DC Converters (POL) in SIP Package	0.5–3 Amp	5
Non-Isolated Step Down DC/DC Converters (POL) SMD Package	0.5–1 Amp	5
SMD DC/DC Converters	1–15 Watt	6 – 7
SIP DC/DC Converters	1–12 Watt	7 – 9
High Performance DC/DC Converters	1–80 Watt	9 – 14
High Power DC/DC Converters / RIA12 Surge Filters	40–300 Watt	14 – 15
Industrial DIN-Rail Mount DC/DC Converters	20–300 Watt	15
Industrial High Power Converters	150 Watt–40 kW/45 kVA	16

### AC/DC Power supplies

Encapsulated AC/DC Power Modules	3–100 Watt	16 – 18
Metal Enclosure and Open Frame Power Supplies	15–850 Watt	18 – 20
Outdoor Power Supply	120 Watt	21

### DIN-RAIL Mount System Solutions

DIN-Rail Power Supplies	6–600 Watt	21
UPS Systems and Function Modules (DIN-Rail and Industrial Cabinets)	72–600 Watt	22



## Non-Isolated Step Down DC/DC Converters (POL) in SIP Package | 0.5–3 Amp

- Alternative to linear voltage regulators
- High efficiency up to 97%
- No heat-sink required
- Over-temperature protection
- Excellent line/load regulation
- Operating temperature –40 to +85°C

### 0.5 AMP

- +Vin/+Vout
- Input 4.75–32 VDC
- 1.5 to 15 Vout fixed
- LM78xx compatible
- 11.5 × 7.6 × 10.2 mm

### TSR 0.5



### 0.6 AMP

- +Vin/+Vout
- Input 9.0–72 VDC
- 3.3 to 24 Vout fixed
- LM78xx compatible
- 12 × 8.6 × 13.4 mm

### TSR 0.6WI



### 1 AMP

- +Vin/+Vout
- Input 1.2–36 VDC
- 1.5 to 15 Vout fixed
- LM78 compatible
- 11.7 × 7.6 × 10 mm

### TSR 1



### 1 AMP

- +Vin/+Vout
- Input 6–36 VDC
- 3.3 and 5.0 Vout fixed
- Cost optimized design
- LM78xx compatible
- 11.5 × 7.6 × 10.2 mm

### TSR 1E



### 1.0 AMP

- +Vin/+Vout
- Input 9.0–72 VDC
- 3.3 to 24 Vout fixed
- LM78xx compatible
- 12.1 × 8.6 × 17.5 mm

### TSR 1WI



### 1 AMP

- Vin/–Vout
- Input –7.0–32 VDC
- 5.0 to –15 Vout fixed
- LM79 compatible
- 11.7 × 7.5 × 16.5 mm

### TSN 1



### 1 AMP

- +Vin/+Vout or –Vout
- Input 4.6–36 VDC
- (±)1.5 to 15 Vout fixed
- 11.7 × 7.5 × 10.2 mm

### TSRN 1



### 1.5 AMP

- +Vin/+Vout
- Input 7–36 VDC
- 3.3, 5.0, 12 Vout fixed
- Cost optimized design
- LM78xx compatible
- 9.6 × 6.4 × 14.9 mm

### TSR 1.5E



### 2 AMP

- +Vin/+Vout
- Input 4.6–36 VDC
- 1.2 to 15 Vout fixed
- Wide temperature range
- LM78 compatible
- 14 × 7.6 × 10.2 mm

### TSR 2N NEW



### 2 AMP

- +Vin/+Vout
- Input 3.0–36 VDC
- 1.2 to 15 Vout fixed
- LM78 compatible
- 14 × 7.5 × 10.1 mm

### TSR 2



### 3 AMP

- +Vin/+Vout
- Input 4.6–36 VDC
- 1.2 to 15 Vout fixed
- Wide temperature range
- LM78 compatible
- 14 × 7.6 × 10.2 mm

### TSR 3N NEW



### 3 AMP

- +Vin/+Vout or –Vout
- Input 2.5–30 VDC
- (±) 0.6 to 15 Vout adjust.
- Remote On/Off
- Open frame
- 16.5 × 10.4 × 6 mm

### TSR 3



## Non-Isolated Step Down DC/DC Converters (POL) SMD Package | 0.5–1 Amp

- Alternative to linear voltage regulators
- High efficiency up to 97%
- No heat-sink required
- Over-temperature protection
- Excellent line/load regulation
- Operating temperature –40 to +85°C

### 0.5 AMP

- +Vin/+Vout
- Input 4.75–32 VDC
- 1.4 to 15.5 Vout adjust.
- Remote On/Off
- 15.3 × 9.6 × 9.2 mm

### TSR 0.5SM



### 1 AMP

- +Vin/+Vout
- Input 3.0–36 VDC
- 1.2 to 15 Vout fixed
- 15.2 × 9.3 × 7.6 mm

### TSR 1SM



### 1 AMP

- +Vin/+Vout or –Vout
- Input 3.0–42 VDC
- (±) 1.2 to 15.5 VDC adjust.
- Remote On/Off
- 15.2 × 9.3 × 7.3 mm

### TSRN 1SM



## SMD DC/DC Converters | 1–15 Watt

- MSL Level 2a or better
- Operating temperature  $-40$  to  $+85^{\circ}\text{C}$
- 1500 VDC I/O-isolation (standard)
- Single and dual output models
- Washable models on request
- Available in tape & reel package

## 1 WATT

## TES 1N

NEW under development

- $\pm 10\%$  input 5, 12, 24 VDC
- 3.3 to 24 VDC (unregulated)
- $13.7 \times 8.4 \times 7.2$  mm (single)
- $16.24 \times 8.4 \times 7.2$  mm (dual)



## 1 WATT

## TES 1

- $\pm 10\%$  Input 5, 12, 24 VDC
- 3.3 to 15 VDC (unregulated)
- $13.7 \times 8.0 \times 7.0$  mm (single)
- $16.2 \times 8.0 \times 7.0$  mm (dual)



## 1 WATT

## TES 1V

- 3000 VDC I/O-isolation
- $\pm 10\%$  Input 5, 12, 24 VDC
- 3.3 to 15 VDC (unregulated)
- $16.3 \times 8.0 \times 8.0$  mm



## 1 WATT

## TRN 1SM

- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- $11.9 \times 11.3 \times 8.0$  mm



## 1 WATT

## TDN 1WISM

- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- $13.2 \times 9.1 \times 10.2$  mm



## 1 WATT

## TMR 1SM

- 2:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- Remote On/Off
- $18.9 \times 13.7 \times 8.7$  mm



## 1 WATT

## TRI 1SM

- Unregulated
- 3000 VAC I/O-isolation rated for 480 VACrms working voltage (reinforced)
- 8000 VDC peak isolation (1s)
- $\pm 10\%$  Input 5 to 24 VDC
- 5.0 to 15 VDC
- $18.9 \times 13.7 \times 10.5$  mm



## 2 WATT

## TES 2E

NEW under development

- $\pm 10\%$  input 5, 12, 24 VDC
- 3.3 to 24 VDC (unregulated)
- $13.7 \times 8.4 \times 7.2$  mm (single)
- $16.24 \times 8.4 \times 7.2$  mm (dual)



## 2 WATT

## TES 2H

- $\pm 10\%$  Input 5, 12, 24 VDC
- 3.3 to 15 VDC (unregulated)
- $16.3 \times 9.3 \times 8.9$  mm



## 2 WATT

## TMR 2WISM

- 4:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- Remote On/Off
- IEC/UL 62368-1
- $19.0 \times 14.9 \times 8.7$  mm



## 2 WATT

## TDR 2(WI)SM

- Epoxy over mold (washable)
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- Remote On/Off
- IEC/UL 62368-1
- $18.9 \times 12.8 \times 8.7$  mm



## 2 WATT

## TRS 2

- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- $11.9 \times 11.3 \times 8.0$  mm



## 2 WATT

## TES 2M

- 4 kVAC I/O-isolation
- $\pm 10\%$  Input 5, 12, 24 VDC
- 5.0 to 15 VDC (unreg.)
- IEC 60601-1 (2  $\times$  MOOP)
- $24.0 \times 13.7 \times 9.3$  mm



## 2 WATT

## TIM 2SM

- Medical safety approval
- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- IEC/UL 62368-1, IEC/ES 60601-1
- SMD-16 ( $24.3 \times 14.4$ )



## 3 WATT

## TRN 3SM

- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- $11.9 \times 11.3 \times 8.0$  mm



## 3 WATT

## TDN 3WISM

- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- Compact design
- $13.2 \times 9.1 \times 10.2$  mm



## 3 WATT

## TMR 3WISM

- 4:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- Remote On/Off
- IEC/UL 62368-1
- $19.0 \times 14.9 \times 8.7$  mm



## 3 WATT

## TDR 3(WI)SM

- Epoxy over mold (washable)
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 5.0 to 15 VDC
- Remote On/Off
- IEC/UL 62368-1
- $18.9 \times 12.8 \times 8.7$  mm



**3.5 WATT****⊕ TIM 3.5SM**

- Medical safety approval (2 × MOPP)
- 2:1/3:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- IEC/UL 62368-1, IEC/ES 60601-1
- SMD-16 (24.3 × 14.4)

**5 WATT****TDN 5WISM**

- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- Compact design
- 13.2 × 9.1 × 10.2 mm

**15 WATT****TON 15WISM**

- EN 55032 class A filter
- 4:1 Input. 9 to 75 VDC
- 3.3 to 15 VDC adjust.
- Remote On/Off
- IEC/UL 62368-1
- 27.9 × 23.9 × 8.5 mm

**SIP DC/DC Converters | 1–12 Watt**

- Single and dual output models (standard)
- Operating temperature –40 to +85°C

- IT approval acc. to IEC/EN/UL 62368-1 (for regulated & high isolation converters)
- 1500 VDC I/O-isolation (standard)

**1 WATT****TBA 1E**

- Unregulated
- Short circuit protection
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5 × 6 × 10 mm

**1 WATT****TEA 1E**

- Unregulated
- Cost optimized design
- ±10% Input 5 VDC
- 5 VDC output (single)
- 19.5 × 6 × 10 mm

**1 WATT****TMA**

- Unregulated
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5 × 6.1 × 10.2 mm

**1 WATT****TBA 1**

- Unregulated
- Short circuit protection
- Compact design
- ±10% Input 3.3 to 24 VDC
- 3.3 to 15 VDC (single only)
- 11.7 × 6 × 10 mm

**1 WATT****TEA 1**

- Unregulated
- Compact and cost optimized design
- ±10% Input 5 VDC
- 5 VDC output (single)
- 11.7 × 6 × 10.2 mm

**1 WATT****TME**

- Unregulated
- Compact design
- ±10% Input 3.3 to 24 VDC
- 3.3 to 15 VDC (single only)
- 11.5 × 6.1 × 10.2 mm

**1 WATT****TMV**

- Unregulated
- 3000 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5 × 6.1 × 10.2 mm

**1 WATT****TBA 1HI**

- Unregulated
- Short circuit protection
- 3000 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5 × 6 × 10 mm

**1 WATT****TEA 1HI**

- Unregulated
- 4000 VDC I/O-isolation
- Cost optimized design
- ±10% Input 5 VDC
- 5 VDC output (single)
- 19.5 × 6 × 10 mm

**1 WATT****TMV-HI**

- Unregulated
- 5200 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 3.3 to 15 VDC
- 19.5 × 7.5 × 10.2 mm

**1 WATT****TMV-EN**

- Unregulated
- 3000 VDC reinforced I/O-isolation
- ±10% Input 5 to 12 VDC
- 5.0 to 15 VDC
- 22.0 × 7.5 × 12.5 mm

**1 WATT****TRI 1**

- Unregulated
- 3000 VAC I/O-isolation rated for 480 VACrms working voltage (reinforced)
- 8000 VDC peak isolation (1s)
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 21 × 12.5 × 7.5 mm

**1 WATT****TRV 1**

- Semi regulation (load)
- 3000 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5 × 6.1 × 10.2 mm

**1 WATT****⊕ TRV 1M**

- Semi regulation
- Medical safety approval (2 × MOPP)
- 5000 VAC I/O-isolation (reinforced)
- ±10% Input 5 to 24 VDC
- 3.3 to 15 VDC
- 19.6 × 9.8 × 12.5 mm

**1 WATT****TRN 1**

- Regulated
- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 11.9 × 7.7 × 11.0 mm



**1 WATT**

- Regulated
- 2:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- 17.0×7.6×11.0 mm

**TMR 1****1 WATT****NEW** under development

- Regulated
- 4:1 input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 17×7.6×11.0 mm

**TMR 1WIN****1 WATT****NEW** under development

- Regulated
- Ultra wide 8:1 input 9 to 75 VDC
- 3.3 to 15 VDC
- Remote On/Off
- 22.3×10.0×11.3 mm

**TEC 1UI****2 WATT**

- Unregulated
- Short circuit protection
- 1500 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5 to 24 VDC output
- 11.3×7.6×10.4 mm

**TMU 2**  
**NEW****2 WATT**

- Unregulated
- 5200 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 3.3 to 15 VDC
- 19.5×7.1×10.2 mm

**TMV 2HI****2 WATT**

- Unregulated
- Short circuit protection
- 1500 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5×7.6×10.2 mm

**TBA 2****2 WATT**

- Unregulated
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 19.5×7.5×10.2 mm

**TMH****2 WATT**

- Regulated
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 21.8×9.1×11.2 mm

**TEC 2(WI)****2 WATT**

- Regulated
- 2:1 Input 4.5 to 75 VDC
- 3.3 to 12 VDC
- Remote On/Off
- 21.8×9.2×11.1 mm

**TMR 2****2 WATT**

- Regulated
- 4:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- Remote On/Off
- 21.8×9.3×11.2 mm

**TMR 2WIN****2 WATT**⊕ **TRV 2M**

- Semi regulation
- Medical safety approval (2×MOPP)
- 5000 VAC I/O-isolation (reinforced)
- ±10% Input 5 to 24 VDC
- 3.3 to 15 VDC
- 19.6×9.8×12.5 mm

**TRV 2M****3 WATT**

- Unregulated
- Short circuit protection
- 1500 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 11.5×8.6×10.2 mm

**TMU 3**  
**NEW****3 WATT**

- Regulated
- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 11.9×7.7×11.0 mm

**TRN 3****3 WATT**

- Regulated
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 21.8×9.1×11.2 mm

**TEC 3(WI)****3 WATT**

- Ultra wide 8:1 Input 9 to 75 VDC
- Regulated
- 3.3 to 15 Vout
- Remote On/Off
- 22.3×10×11.3 mm

**TEC 3UI**  
**NEW****3 WATT**

- Regulated
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- Remote On/Off
- 21.8×9.2×11.2 mm

**TMR 3(WI)****3 WATT**

- Regulated
- 3000 VDC I/O-isolation
- 2:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- Remote On/Off
- 21.8×9.2×11.2 mm

**TMR 3HI****3 WATT**

- Ultra low ripple & noise
- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 21.8×9.6×11.2 mm

**TVN 3****3 WATT**🚂 **TMR 3WIR**

- Railway approval
- Regulated
- 3000 VDC I/O-isolation
- 4:1 Input 9 to 160 VDC
- 3.3 to 24 VDC
- 21.8×9.6×11.2 mm

**4 WATT**

- Regulated
- 2:1 or 4:1 Input 9 to 75 VDC
- 5 to 24 VDC
- Remote On/Off
- 21.8×9.3×11.2 mm

**TMR 4(WI)****6 WATT**

- Regulated
- 2:1 Input 4.5 to 9 VDC
- 3.3 to 24 Vout
- Remote On/Off
- 22.3×10×11.3 mm

**TEC 6**  
**NEW**



**6 WATT****TEC 6UI**  
**NEW**

- Ultra wide 8:1 Input 9 to 75 VDC
- Regulated
- 3.3 to 24 Vout
- Remote On/Off
- 22.3 × 10 × 11.3 mm

**6 WATT****TMR 6(WI)**

- Regulated
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 21.8 × 9.1 × 11.2 mm

**6 WATT****TMR 6WIR**

- Railway approval
- Regulated
- 3000 VDC I/O-isolation
- 4:1 Input 9 to 160 VDC
- 3.3 to 24 VDC
- 21.8 × 9.6 × 11.2 mm

**8 WATT****TMR 8WI****NEW under development**

- Regulated
- 4:1 Input 4.5 to 75 VDC
- 5.0 to 24 Vout
- Wide temperature range
- Remote On/Off
- 21.8 × 9.6 × 12 mm

**8 WATT****TEC 8UI****NEW under development**

- Regulated
- Ultra wide 8:1 input 9 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 22.3 × 10.0 × 11.3 mm

**9 WATT****TMR 9(WI)**

- Regulated
- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 21.8 × 9.1 × 11.2 mm

**10 WATT****TMR 10WI****NEW under development**

- Regulated
- 4:1 Input 4.5 to 75 VDC
- 5.1 to 24 Vout
- Wide temperature range
- Remote On/Off
- 21.8 × 9.6 × 12 mm

**12 WATT****TMR 12WI**

- Regulated
- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Remote On/Off
- 22 × 9.6 × 12 mm

**High Performance DC/DC Converters | 1–80 Watt**

- Fully regulated outputs
- Single, dual (and triple) output models
- 1500 VDC I/O-isolation (standard)
- IT approval acc. to IEC/EN/UL 62368-1
- Operating temperature –40 to +85°C
- Opt. heat-sink for most >10 Watt models
- Remote On/Off control

**1 WATT****TDU 1**

- Unregulated
- Short circuit protection
- 1500 VDC I/O-isolation
- ±10% Input 5 to 24 VDC
- 5 to 15 VDC output
- 12.7 × 10.2 × 8.0 mm

**1 WATT****TDN 1WI**

- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 13.2 × 9.1 × 10.2 mm

**2 WATT****TDL 2**

- Compact design
- 2:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- 14.0 × 14.0 × 8.0 mm

**2 WATT****TDR 2(WI)**

- Epoxy over-mold
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 5.0 to 15 VDC
- 18.9 × 12.8 × 8.7 mm

**2 WATT****TEL 2**


- 2:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- EN 55032 class A filter
- DIP-16 (23.8 × 13.7)

**2 WATT****THI 2M**

- Unregulated
- 2 × MOOP
- ±10 % Input 5 to 24 VDC
- 5.0 to 15 VDC
- DIP-16 (23.8 × 13.7)

**2 WATT****⊕ TIM 2**

- Medical safety approval
- 2:1/3:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- DIP-16 (24.3 × 14.4)

**3 WATT****TDL 3**

- Compact design
- 2:1 Input 4.5 to 75 VDC
- 3.3 to 15 VDC
- 14.0 × 14.0 × 8.0 mm

**3 WATT****TDN 3WI**


- Ultra compact design
- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 13.2 × 9.1 × 10.2 mm





**3 WATT****TDR 3(WI)**

- Epoxy over-mold
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 5.0 to 15 VDC
- 18.9×12.8×8.7 mm

**3 WATT****THL 3WI**

- 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8×13.7)

**3 WATT****TEM 3N**

- Cost down redesign
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****TEN 3(WI)N**

- Cost down redesign
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****TEN 3WIRH**

- Railway approval
- 4:1 Input 36 to 160 VDC
- 3.3 to 24 VDC
- Reinforced Isolation
- DIP-24 (32×20.3)

**3.5 WATT****TRI 3**

- 5000 VAC I/O-isolation rated for 1000 Vrms working voltage
- 2:1 Input 4.5 to 75 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****THR 3WI**

- 3000 VAC I/O-isolation (reinforced)
- 4:1 Input 9 to 160 VDC
- 5 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****THI 3**

- Regulated
- ±10% Input 5 to 24 VDC
- 5.0 to 15 VDC
- 2×MOOP
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****THP 3**

- Regulated
- 4:1 Input 9 to 160 VDC
- 5.0 to 12 VDC
- 2×MOOP
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3 WATT****⊕ THM 3(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**3.5 WATT****⊕ TIM 3.5**

- Medical safety approval
- 2:1/3:1 Input 4.5 to 75 VDC
- 5.0 to 24 VDC
- DIP-16 (24.3×14.4)

**5 WATT****TDN 5WI**

- Highest power density
- 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- 13.2×9.1×10.2 mm

**5 WATT****TVN 5WI**

- Ultra low ripple & noise
- 4:1 Input 4.5 to 75 VDC
- 3.3 to 48 VDC
- EN 55032 class B filter
- Case pin
- DIP-24 (32×20.3)

**5 WATT****TEL 5**

- Cost optimized
- 2:1 Input 9 to 36 VDC
- 3.3 to 15 VDC
- DIP-24 (32×20.3)

**6 WATT****TMDC 06**

- 4:1 Input 9 to 75 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- Chassis/DIN-rail
- Screw terminal connection
- 53×34×26.5 mm

**6 WATT****TMDC 06H**

- 2:1 Input 80 to 160 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- Chassis/DIN-rail
- Screw terminal connection
- 53×34×26.5 mm

**6 WATT****TEL 6WIN****NEW** under development

- Regulated
- 4:1 input 4.5 to 75 VDC
- 3.3 to 24 VDC
- Short circuit protection
- 23.8×13.7×8.0 mm

**6 WATT****TEN 6(WI)N**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**6 WATT****TEN 6WIN-HI**

- 3000 VDC I/O-isolation
- 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**6 WATT****TEN 6WIRH**

- Railway approval
- 4:1 Input 36 to 160 VDC
- 3.3 to 24 VDC
- Reinforced Isolation
- DIP-24 (32×20.3)

**6 WATT****TRI 6**

- 5000 VAC I/O-isolation rated for 1000 Vrms working voltage
- 2:1 Input 9.0 to 75 VDC
- 5.0 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)



**6 WATT****⊕ THM 6(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**6 WATT****⊕ TIM 6  
NEW**

- Medical safety approval
- 2:1 Input 9 to 75 VDC
- 3.3 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**8 WATT****TEL 8(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-16 (24.1×14)

**8 WATT****TEN 8**

- 2:1 Input 9 to 75 VDC
- 3.3 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**8 WATT****🚂 TEN 8WI**

- Railway approval
- 4:1 Input 9 to 160 VDC
- 3.3 to 15 VDC
- Increased EMC immunity
- DIP-24 (32×20.3)

**10 WATT****TEL 10**

- Highest power density of 3.83 W/cm<sup>3</sup>
- 2:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8×13.3)

**10 WATT****TEL 10WI**

- Highest power density of 3.83 W/cm<sup>3</sup>
- 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8×13.3)

**10 WATT****THD 10(WI)N**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**10 WATT****🚂 THN 10WIR**

- Railway approval
- EN 55032 class A filter
- 4:1 Input 9 to 160 VDC
- 3.3 to 24 VDC adjust.
- Increased EMC immunity
- 1"×1"

**10 WATT****🚂 THN 10UIR  
NEW**

- 10 watt DC/DC converter
- Railway
- 12:1 input
- 3000 VDC isolation
- PCB-mount
- 1"×1"

**10 WATT****🚂 TEN 10WIRH**

- Railway approval
- 4:1 Input 36 to 160 VDC
- 3.3 to 24 VDC
- Reinforced Isolation
- DIP-24 (32×20.3)

**10 WATT****TRI 10**

- 5000 VAC I/O-isolation rated for 1000 Vrms working voltage
- 2:1 Input 9 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**10 WATT****THR 10WI**

- 3000 VAC I/O-isolation (reinforced)
- 4:1 Input 9 to 160 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- 2"×1"

**10 WATT****⊕ THM 10(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 4.5 to 75 VDC
- 3.3 to 24 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**10 WATT****TMDC 10**

- Chassis/DIN-rail
- Screw terminal connection
- 4:1 Input 9 to 75 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 79×34×22 mm

**10 WATT****TMDC 10H**

- Chassis/DIN-rail
- Screw terminal connection
- 2:1 Input 80 to 160 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 79×34×22 mm

**12 WATT****TEL 12**

- Highest power density of 3.61 W/cm<sup>3</sup>
- 2:1 Input 9 to 75 VDC
- 5.1 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8×13.3)

**12 WATT****TEL 12WI**

- Highest power density of 3.61 W/cm<sup>3</sup>
- 4:1 Input 9 to 75 VDC
- 5.1 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8×13.3)

**12 WATT****THD 12(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**15 WATT****THD 15(WI)N**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 15 VDC
- EN 55032 class A filter
- DIP-24 (32×20.3)

**15 WATT****THN 15N**

- 2:1 Input 9 to 75 VDC
- 3.3 to 48 VDC adjust.
- EN 55032 class A filter
- 1"×1"
- Low no-load power consumption



**15 WATT****THL 15WI**

- cost efficient design
- 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC adjust.
- EN 55032 class A filter
- 1" x 1"

**15 WATT****THN 15WI**

- 4:1 Input 9 to 75 VDC
- 3.3 to 48 VDC adjust.
- 1" x 1"
- Remote On/Off

**15 WATT****TEL 15N**

- Highest power density 4.51 W/cm<sup>3</sup>
- 2:1 Input 9 to 75 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8 x 13.7)

**15 WATT****TEL 15N-HS**

- High temperature range, up to 70°C without derating
- 2:1 Input 9 to 75 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- DIP-16 (24.4 x 14.3 x 24.4)

**15 WATT****TEL 15WIN**


- Highest power density of 4.51 W/cm<sup>3</sup>
- 4:1 Input 9 to 75 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- DIP-16 (23.8 x 13.7)

**15 WATT****TEL 15WIN-HS**

- High temperature range, up to 70°C without derating
- 4:1 Input 9 to 75 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- DIP-16 (24.4 x 14.3 x 24.4)

**15 WATT****TRI 15**

- 4200 VAC I/O-isolation rated for 1000 Vrms working voltage
- 2:1 Input 9 to 75 VDC
- 5.1 to 24 VDC
- EN 55032 class A filter
- 2" x 1"

**15 WATT****THN 15WIR**

- Railway approval
- EN 55032 class A filter
- 4:1 Input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- Increased EMC immunity
- 1" x 1"

**15 WATT****THN 15UIR**  
**NEW**

- 15 watt DC/DC converter
- Railway
- 12:1 input
- 3000 VDC isolation
- PCB-mount
- 1" x 1"

**15 WATT****THM 15(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 9 to 75 VDC
- 5.0 to 24 VDC
- EN 55032 class A filter
- 1.6" x 1"

**20 WATT****THN 20(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 48 VDC adjust.
- EN 55032 class A filter
- 1" x 1"

**20 WATT****TEN 20WIN**


- 4:1 Input 9 to 75 VDC
- 3.3 to 15 VDC adjust.
- Remote On/Off
- 2" x 1"

**20 WATT****TEL 20WIN**  
**NEW under development**

- Regulated
- 4:1 input 4.5 to 75 VDC
- 5 to 24 VDC adjust.
- Short circuit protection
- 26.4 x 16.3 x 12.7 mm

**20 WATT****TRI 20**

- 4200 VAC I/O-isolation rated for 1000 Vrms working voltage
- 2:1 Input 9 to 75 VDC
- 5.1 to 24 VDC
- EN 55032 class A filter
- 2" x 1"

**20 WATT****THR 20WI**

- 3000 VAC I/O-isolation (reinforced)
- 4:1 Input 9 to 160 VDC
- 5 to 24 VDC
- EN 55032 class A filter
- 2" x 1"

**20 WATT****THN 20WIR**

- Railway approval
- 4:1 Input 9 to 160 VDC
- 3.3 to 24 VDC adjust.
- Increased EMC immunity
- 1" x 1"

**20 WATT****THN 20UIR**  
**NEW**

- 20 watt DC/DC converter
- Railway
- 12:1 input
- 3000 VDC isolation
- PCB-mount
- 1" x 1"

**20 WATT****TEN 20WIR**

- Railway approval
- EN 55032 class A filter
- 4:1 Input 9 to 160 VDC
- 3.3 to 15 VDC adjust.
- Increased EMC immunity
- 2" x 1"

**20 WATT****TEN 20WIRH**

- Railway approval
- 4:1 Input 36 to 160 VDC
- 5.1 to 24 VDC
- Reinforced Isolation
- 1.6" x 1"

**20 WATT****THM 20(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 9 to 75 VDC
- 5.0 to 24 VDC
- EN 55032 class A filter
- 1.6" x 1"

**20 WATT****TMDC 20**

- Chassis/DIN-rail
- Screw terminal connection
- 4:1 Input 9 to 75 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 3.8" x 2.1" x 0.9"





**20 WATT****TMDC 20H**

- Chassis/DIN-rail
- Screw terminal connection
- 2:1 Input 80 to 160 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 3.8" x 2.1" x 0.9"

**20 WATT****TEQ 20WIR**

- Railway approval
- EN 55032 class B filter
- 4:1 Input 9 to 160 VDC
- 5.0 to 24 VDC adjust.
- Increased EMC immunity
- Temp. range -40 to 93°C
- 4.1" x 2.3" x 1"

**25 WATT****THL 25(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 15 VDC adjust.
- Remote On/Off
- 1" x 1"

**30 WATT****TEN 30**

- 2:1 Input 9 to 75 VDC
- 3.3 to 15 VDC adjust.
- Remote On/Off
- 2" x 1"

**30 WATT****TEN 30WIN**

- With triple output models
- 4:1 Input 9 to 75 VDC
- 3.3 to 15 VDC adjust.
- 2" x 1"

**30 WATT****TEN 30UIR**  
**NEW**

- 30 watt DC/DC converter
- Railway
- 12:1 input
- 3000VDC isolation
- PCB-mount
- 2" x 1"

**30 WATT****THN 30(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC adjust.
- Remote On/Off
- 1" x 1"

**30 WATT****THL 30WI**  
**NEW**

- High power density
- 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC adjust.
- EN 55032 class A filter
- 1" x 1"

**30 WATT****THN 30WIR**

- Railway approval
- 4:1 Input 9 to 160 VDC
- 3.3 to 24 VDC adjust.
- Increased EMC immunity
- 1" x 1"

**30 WATT****THM 30(WI)**

- Medical safety approval
- 2:1 or 4:1 Input 9 to 75 VDC
- 5.0 to 24 VDC
- EN 55032 class A filter
- 2" x 1"

**40 WATT****THL 40WI**  
**NEW**

- 4:1 Input 9 to 75 VDC
- 5 to 24 VDC adjust.
- Highest power density
- Remote On/Off and Trim
- 1" x 1"

**40 WATT****TEN 40(WI)E**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC adjust.
- Maximized quality in a cost efficient design
- Remote On/Off
- 2" x 1"

**40 WATT****THR 40WI**

- 3000 VAC I/O-isolation (reinforced)
- 4:1 Input 36 to 160 VDC
- 5 to 24 VDC
- 2" x 1"

**40 WATT****TEN 40WIR**

- Railway approval
- 4:1 Input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- Increased EMC immunity
- 2" x 1"

**40 WATT****TEN 40WIRH**

- Railway approval
- 4:1 Input 36 to 160 VDC
- 5.1 to 24 VDC
- Reinforced Isolation
- 2" x 1"

**40 WATT****TEN 40UIR**  
**NEW**

- 40 watt DC/DC converter
- Railway
- 12:1 input
- 3000VDC isolation
- PCB-mount
- 2" x 1"

**40 WATT****TEQ 40WIR**

- Railway approval
- EN 55032 class B filter
- 4:1 Input 9.5 to 160 VDC
- 5.0 to 24 VDC adjust.
- Increased EMC immunity
- 4.1" x 2.3" x 1"

**40 WATT****TMDC 40**

- Chassis/DIN-rail
- Screw terminal connection
- 4:1 Input 9 to 75 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 4.4" x 2.5" x 1"

**40 WATT****TMDC 40H**

- Chassis/DIN-rail
- Screw terminal connection
- 2:1 Input 80 to 160 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 4.4" x 2.5" x 1"

**50 WATT****TEN 50(WI)**

- 2:1 or 4:1 Input 9 to 75 VDC
- 3.3 to 24 VDC adjust.
- Over temperature protection
- Remote On/Off
- 2" x 1"

**60 WATT****TEN 60(WI)N**

- 2:1 or 4:1 Input 9 to 75 VDC
- 5.0 to 48 VDC adjust.
- EN 55032 class A filter
- 2" x 1"



**60 WATT** **TEN 60WIR**

- Railway approval
- 4:1 Input 9 to 160 VDC
- 5 to 48 VDC adjust.
- Increased EMC immunity
- 2" x 1"

**60 WATT** **THM 60WI**

- Medical safety approval
- 2 x MOPP
- 4:1 Input 9 to 75 VDC
- 5.0 to 24 VDC adjust.
- 2.3" x 1.45" x 0.5"

**60 WATT****TMDC 60**

- Chassis/DIN-rail
- Screw terminal connection
- 4:1 Input 9 to 75 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 4.4" x 2.7" x 1.5"

**60 WATT****TMDC 60H**

- Chassis/DIN-rail
- Screw terminal connection
- 2:1 Input 80 to 160 VDC
- 5.1 to 48 VDC
- EN 55032 class A filter
- 4.4" x 2.7" x 1.5"

**80 WATT****TEN 80WI**  
**NEW**

- 4:1 Input 9 to 75 VDC
- 5 to 48 VDC adjust.
- Highest power density
- Remote On/Off and Trim
- 2" x 1"

**High Power DC/DC Converters / RIA12 Surge Filters | 40–300 Watt**

- Excellent thermal management
- EN 55032 class A (chassis models)
- Increased EMC immunity

- Entire protective structure
- Control functions
- Wide selection of options

**0–300 WATT****TFI**

- RIA 12, NF F01-510 Surge Filter
- Clamps overvoltage transients (up to 385 VDC) at 168 VDC
- Wide input 43 to 160 VDC
- Brownout voltage 36 VDC min.
- DIP-24 or 1.6" x 1"

**40 WATT** **TEP 40UIR**

- Railway approval
- Ultra wide 12:1 Input 9 to 160 VDC
- 5 to 53 VDC adjust.
- PCB mount
- 2.3" x 1.45" x 0.5"

**60 WATT** **TEP 60UIR**

- Railway approval
- Ultra wide 12:1 Input 9 to 160 VDC
- 5 to 53 VDC
- PCB mount
- 2.3" x 1.45" x 0.5"

**75 WATT****TER 75WIR**  
**NEW under development**

- Railway approval
- 4:1 input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- PCB mount
- 2.3" x 1.45" x 0.5"

**75 WATT** **TEP 75WI**


- Railway approval
- 4:1 Input 9 to 160 VDC
- 5.0 to 48 VDC adjust.
- PCB / chassis / DIN-rail
- 2.4" x 2.3" x 0.5"

**100 WATT****TER 100WIR**  
**NEW under development**


- Railway approval
- 4:1 input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- PCB mount
- 2.3" x 1.45" x 0.5"

**100 WATT****TEP 100**


- 2:1 Input 9 to 75 VDC
- 3.3 to 48 VDC adjust.
- PCB / chassis / DIN-rail
- 2.4" x 2.3" x 0.5"

**100 WATT** **TEP 100UIR**

- Railway approval
- Ultra wide 12:1 Input 9 to 160 VDC
- 5 to 53 VDC
- PCB mount
- 2.3" x 1.45" x 0.5"

**100 WATT** **TEP 100WIR**

- Railway approval
- 4:1 Input 9.0 to 160 VDC
- 5.0 to 48 VDC adjust.
- PCB / chassis / DIN-rail
- 2.4" x 2.3" x 0.5"

**100 WATT** **TEQ 100WIR**


- Railway approval
- 85°C full load operation
- 4:1 Input 10.0 to 160 VDC
- 12 to 48 VDC adjust.
- UL 508 approval
- 3" x 4" x 3.5"

**150 WATT****TER 150WIR**  
**NEW under development**

- Railway approval
- 4:1 input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- PCB mount
- 2.3" x 1.45" x 0.5"

**150 WATT** **TEP 150WI**

- CV / CC for battery charging
- Railway approval
- 4:1 Input 9 to 160 VDC
- 12 to 48 VDC adjust.
- EN 55032 class B (opt.)
- 98 x 65 x 38 mm





**150 WATT****TEP 150UIR**  
**NEW**

- Railway approval
- Ultra wide 10:1 Input 16 to 160 VDC
- 5 to 53 VDC
- PCB mount
- 2.4" x 2.3" x 0.5"

**160 WATT****TEP 160**

- 2:1 Input 16.5 to 75 VDC
- 12 to 53 VDC adjust.
- PCB / chassis / DIN-rail
- Soft start
- 2.4" x 2.3" x 0.5"

**160 WATT****TEP 160WIR**

- Railway approval
- 4:1 Input 9.0 to 160 VDC
- 12 to 53 VDC adjust.
- PCB / chassis / DIN-rail
- 2.4" x 2.3" x 0.5"

**160 WATT****TEQ 160WIR**

- Railway approval
- 75°C full load operation
- 4:1 Input 19 to 160 VDC
- 12 to 48 VDC adjust.
- UL 508 approval
- 3" x 4" x 3.5"

**200 WATT****TER 200WIR****NEW under development**

- Railway approval
- 4:1 input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- PCB mount
- 2.3" x 1.45" x 0.5"

**200 WATT****TEP 200WIR**

- Railway approval
- 4:1 Input 9.0 to 160 VDC
- 12 to 53 VDC adjust.
- Chassis mount / PCB
- DIN-rail mount opt.
- 2.4" x 2.3" x 0.5"

**200 WATT****TEP 200UIR**  
**NEW**

- Railway approval
- Ultra wide 10:1 Input 16 to 160 VDC
- 5 to 53 VDC
- PCB mount
- 2.4" x 2.3" x 0.5"

**200 WATT****TEQ 200WIR**

- Railway approval
- 70°C full load operation
- 4:1 Input 19 to 160 VDC
- 12 to 48 VDC adjust.
- UL 508 approval
- 3" x 4" x 3.5"

**300 WATT****TEP 300WIR****NEW under development**

- Railway approval
- 4:1 input 9 to 160 VDC
- 3.3 to 48 VDC adjust.
- PCB mount
- 2.4" x 2.3" x 0.5"

**300 WATT****TEQ 300WIR**

- CV / CC for battery charging
- Railway approval
- 4:1 Input 18 to 160 VDC
- 12 to 48 VDC adjust.
- UL 508 approval
- Load share function
- 6" x 4" x 1.5"

**Industrial DIN-Rail Mount DC/DC Converters | 20–300 Watt**

- DC/DC modules designed for DIN-Rail mount
- DC/DC modules with optional mounting kit for DIN-Rail mount

**24–60 WATT****TCL-DC**

- Slim plastic casing
- UL 508 approval
- 4:1 Input 9.5 to 75 VDC
- 5.0 to 24 VDC
- EN 55032 class B filter
- 75 x 100 x 27/45 mm

**20–60 WATT****TMDC Series**

- Mounting kit for Modules  
TMDC 20  
TMDC 40  
TMDC 60

**20–300 WATT****TEQ Series**

- Mounting kit for all TEQ Series models (not on picture: TEQ 20WIR, TEQ 40WIR and TEQ 300WIR)



## Industrial High Power Converters | 150 Watt–40 kW/45 kVA

- DC/DC & AC/DC converters up to 40 kW
- DC/AC inverters up to 45 kVA
- AC/AC static switches up to 10 kVA
- Eurocassette, 19" Plug-in Modules, wall/chassis mount or DIN-Rail mount
- IEC/EN/UL 62368-1 approvals
- Modular options and customised solutions

### 150–5000 WATT

TSC

- 19" plug-in /chassis / DIN
- 5 to 400 VDC
- Input 10 to 800 VDC or AC input
- Entire protection circuit
- Individual power solutions



### 5–40 kW

TSC 19

- 19" sub rack
- 5 to 800 VDC
- Input 40 to 800 VDC or AC input
- Entire protection circuit
- Individual power solutions



### 200 VA–45 kVA

TSD

- AC output with true sine wave
- Single and three phase
- 10 to 800 VDC input models
- AC input for frequency conversion
- Configurable for individual power solutions



## Encapsulated AC/DC Power Modules | 3–100 Watt

- Universal input (85–264 VAC)
- EN 55032 class B filter
- ErP ready
- IEC/EN/UL 62368-1 approvals
- Start-up temperature –40°C for several series

### 3 WATT

TMPS 03

- PCB mount
- EN 60335-1 (household)
- 3.3 to 24 VDC
- 1" × 1" × 0.6"



### 4 WATT

TMLM 04

- PCB mount
- 3.3 to 24 VDC
- Single and dual
- Compact design



### 5 WATT

TMPS 05

- PCB mount
- EN 60335-1 (household)
- 3.3 to 48 VDC
- 1" × 1" × 0.6"



### 5 WATT

TMPW 5

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 3.3 to 24 VDC
- 1.45" × 1.08" × 0.7"



### 5 WATT

TMPW 5-J/-T

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 3.3 to 24 VDC
- 2.17" × 1.08" × 0.91"



### 10 WATT

TMPS 10

- PCB mount
- Inc. EMC immunity
- EN 60335-1 (household)
- 3.3 to 48 VDC
- Ultra-compact design 1.5" × 1" × 0.6"



### 10 WATT

TMPW 10

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 5 to 24 VDC
- 1.45" × 1.08" × 0.8"



### 10 WATT

TMPW 10-J/-T

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 5 to 24 VDC
- 2.17" × 1.08" × 0.91"



### 15 WATT

TMPW 15  
NEW

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 5 to 48 VDC
- 1.8" × 1.1"



### 15 WATT

TMPW 15-J/-T  
NEW

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 5 to 48 VDC
- 2.7" × 1.35"



### 15 WATT

TMPS 15

- PCB mount
- Inc. EMC immunity
- EN 60335-1 (household)
- 3.3 to 48 VDC
- 2.06" × 1.07" × 0.93"



### 15 WATT

TPP 15-J

- Medical safety approval
- Chassis mount with JST connectors
- 3.3 to 48 VDC
- EN 60335-1
- 2.82" × 1.14" × 0.82"



**15 WATT**
 **TPP 15-D**

- Medical safety approval
- PCB mount
- 3.3 to 48 VDC
- EN 60335-1
- 1.65" × 1.14" × 0.85"

**4–24 WATT**
 **TIW**

- IP67 casing w. flying leads
- Fire safety for furniture
- EN 60335-1 (household)
- 3.3 to 24 VDC
- Mount in flush boxes

**25 WATT**
 **TMPW 25**  
**NEW models**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 5.1 to 24 VDC
- 2.07" × 1.08" × 0.9"

**25 WATT**
 **TMPW 25-J/-T**  
**NEW models**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 5.1 to 24 VDC
- 3.48" × 1.08" × 0.95"

**5–30 WATT**
 **TMF**

- Medical safety approval
- PCB mount
- Fully encapsulated
- Highest power density
- 5 to 24 VDC
- Single output

**30 WATT**
 **TPP 30-J**

- Medical safety approval
- Chassis mount with JST connectors
- 3.3 to 48 VDC
- EN 60335-1
- JST connection
- 3.95" × 1.5" × 1.0"

**30 WATT**
 **TPP 30-D**

- Medical safety approval
- PCB mount, throughhole
- 3.3 to 48 VDC
- EN 60335-1
- 2.89" × 1.5" × 1.0"

**24–36 WATT**
 **TMW**

- Medical safety approval
- IP68 casing w. flying leads
- Mount in flush boxes
- Fire safety for furniture
- EN 60335-1 (household)
- 5 to 24 VDC

**40 WATT**
 **TMPW 40**  
**NEW**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 5 to 48 VDC
- 2.52" × 1.8" × 0.9"

**40 WATT**
 **TMPW 40-J/-T**  
**NEW**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 5 to 48 VDC
- 3.48" × 1.84" × 1.0"

**40 WATT**
 **TPP 40E-D**

- Medical safety approval
- 5.0 to 48 VDC
- Protection class II
- PCB mount
- 3.2" × 2.2" × 1.2"

**40 WATT**
 **TPP 40E-J**

- Medical safety approval
- 5.0 to 48 VDC (adj.)
- Protection class II
- JST connection
- 4.3" × 2.2" × 1.2"

**7–50 WATT****TMG**

- PCB mount
- Compact design
- 3.3 to 48 VDC
- Safety class II prepared

**50 WATT**
 **TMPW 50**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 12 to 24 VDC
- 2.92" × 1.85" × 0.9"

**50 WATT**
 **TMPW 50-J/-T**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 12 to 24 VDC
- 3.81" × 1.85" × 1"

**7–60 WATT****TMP**

- PCB mount
- Industr. EMC immunity
- 3.3 to 48 VDC
- Single, dual, triple

**15–60 WATT****TMP-C**

- Chassis mount
- Ind. EMC immunity
- 5.0 to 48 VDC
- Single, dual, triple
- UL 508 approval
- DIN-Rail clip

**20–40 WATT****TML**

- PCB / chassis
- Single, dual, triple
- 3.3 to 24 VDC
- Protection class II for TML 40

**24–60 WATT****TMM**

- PCB mount
- Fully encapsulated
- Low profile
- 5.0 to 48 VDC

**24–60 WATT****TMM-C**

- Chassis mount
- Fully encapsulated
- Low profile
- 5.0 to 48 VDC
- Single / dual output
- UL 508 approval
- DIN-Rail clip

**60 WATT**
 **TMPW 60**  
**NEW**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 12 to 48 VDC
- 2.92" × 1.85" × 0.9"





**60 WATT** ⚡ **TMPW 60-J/-T****NEW**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 12 to 48 VDC
- 3.81" × 1.85" × 1"

**65 WATT** ⚡ **TPP 65E-D**

- Medical safety approval
- 5.0 to 48 VDC
- Protection class II
- PCB mount
- 3.2" × 2.2" × 1.2"

**65 WATT** ⚡ **TPP 65E-J**

- Medical safety approval
- 5.0 to 48 VDC (adj.)
- Protection class II
- JST connection
- 4.3" × 2.2" × 1.2"

**80 WATT** ⚡ **TMPW 80****NEW under development**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 12 to 48 VDC
- 3.2" × 1.85" × 1.06"

**80 WATT** ⚡ **TMPW 80-J/-T****NEW under development**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 12 to 48 VDC
- 4.0" × 1.9" × 1.1"

**100 WATT** **TML 100C**

- Chassis mount
- Active PFC
- 12 to 48 VDC
- 140 × 60 × 37 mm

**100 WATT** ⚡ **TMPW 100****NEW under development**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- PCB mount
- 12 to 48 VDC
- 3.5" × 2.05"

**100 WATT** ⚡ **TMPW 100-J/-T****NEW under development**

- Extended input 90 to 305 VAC
- EN 60335-1 (household)
- Chassis mount
- 12 to 48 VDC
- 4.57" × 2.2"

**Metal Enclosure and Open Frame Power Supplies | 15–850 Watt**

- Excellent thermal management
- Universal input (85–264 VAC)
- EN 61000-3-2 compliant

- IEC/EN/UL 62368-1 approvals
- EN 55032 class B filter
- ErP ready

**15–200 WATT** **TXM**

- Cost optimized design
- Fanless operation
- 3.3 to 48 VDC adjust.

**18–960 WATT** **TXLN**

- 3.3 to 48 VDC adjust.
- Single, dual, triple
- <200 Watt fanless
- Active PFC >0.95
- Screw terminal block

**25–1000 WATT** **TXN****NEW**

- Cost optimized design
- 3.3 to 48 VDC adjust.
- Up to 200 Watt fanless
- Active PFC >0.95
- Screw terminal block

**15 WATT** ⚡ **TPP 15A-J**

- Medical safety approval
- Ultra compact
- 3.3 to 48 VDC
- EN 60335-1
- JST connection
- 2.6" × 1" × 0.73"

**15 WATT** ⚡ **TPP 15A-D**

- Medical safety approval
- Ultra compact
- 3.3 to 48 VDC
- EN 60335-1
- PCB mount
- 1.5" × 1" × 0.82"

**30 WATT** **TPI 30A-J**

- Ultra compact
- Peak power up to 40 Watt
- 3.3 to 53 VDC
- JST connection
- 3.34" × 1.36" × 0.8"

**30 WATT** ⚡ **TPP 30A-J**

- Medical safety approval
- Ultra compact
- 3.3 to 48 VDC
- EN 60335-1
- JST connection
- 3.34" × 1.36" × 0.88"

**30 WATT** ⚡ **TPP 30A-D**

- Medical safety approval
- Ultra compact
- 3.3 to 48 VDC
- EN 60335-1
- PCB mount
- 2.74" × 1.36" × 0.95"

**40 WATT** ⚡ **TPP 40A**

- Medical safety approval
- 5.0 to 48 VDC adjust.
- Protection class I & II
- JST connection
- 3" × 2" × 1.05"



**40 WATT****⊕ TPP 40**

- Medical safety approval
- 5.0 to 24 VDC adjust.
- Single, dual, triple
- Protection class I & II
- 3.5" x 2.4" x 1.3" mm
- Opt.: DIN-rail, pin con.

**45 WATT****TXO 45  
NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 3" x 2" x 1.1"

**50 WATT****TPI 50A-J  
NEW**

- Ultra compact
- Peak power up to 70 Watt
- 5.0 to 48 VDC
- Protection class II
- JST connection
- 3" x 1.5" x 1.2"

**60 WATT****TXH 060**

- 5.0 to 48 VDC (adj.)
- 3" x 1.7"
- Screw terminals

**60 WATT****TXO 60  
NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 3" x 2" x 1.1"

**65 WATT****TPI 65A-J**

- Ultra compact
- Peak power up to 90 Watt
- 5.0 to 53 VDC
- Protection class I & II
- JST connection
- 3" x 2" x 1.1"

**65 WATT****⊕ TPP 65A**

- Medical safety approval
- 5.0 to 48 VDC (adj.)
- Protection class I & II
- JST connection
- 3" x 2" x 1.1"

**65 WATT****⊕ TPP 65**

- Medical safety approval
- 5.0 to 24 VDC (adj.)
- Single, dual, triple
- Protection class I & II
- 3.5" x 2.5" x 1.3"
- Opt.: DIN-rail, pin con.

**100 WATT****TOP 100**

- 5.0 to 48 VDC (adj.)
- Protection class I & II
- Pin connection
- 4" x 2" x 1.2"

**100 WATT****TOP 100C**

- 5.0 to 48 VDC (adj.)
- Protection class I & II
- Pin connection
- 4.5" x 2.5" x 1.5"

**100 WATT****TPI 100A**

- 12 to 48 VDC (adj.)
- Protection class I & II
- 3" x 2" x 1.3"
- Opt.: Casing

**100 WATT****⊕ TPP 100A**

- Medical safety approval
- 12 to 48 VDC (adj.)
- Protection class I & II
- JST connection
- 3" x 2" x 1.3"

**100 WATT****⊕ TPP 100**

- Medical safety approval
- 12 to 48 VDC (adj.)
- Protection class I & II
- 3.6" x 2.4" x 1.5"
- Opt.: DIN-rail, pin con.

**120 WATT****TXO 120  
NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 3" x 2" x 1"

**125 WATT****TPI 125A-J**

- Ultra compact
- Peak power up to 150 Watt
- 5.0 to 48 VDC
- Protection class II
- JST connection
- 3" x 2" x 1.2"

**130 WATT****TCI 130  
NEW**

- Unique conduction cooled design
- 12 to 48 VDC
- Protection class II
- OVC III
- JST connection
- 3" x 2.35" x 1.1"

**150 WATT****TXO 150  
NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 4" x 2" x 1.45"

**150 WATT****TPI 150A**

- 12 to 48 VDC (adj.)
- Protection class II
- 4" x 2" x 1.3" (opt. casing)
- JST connection

**150 WATT****⊕ TPP 150A**

- Medical safety approval
- 12 to 48 VDC (adj.)
- Protection class I & II
- 4" x 2" x 1.3"

**150 WATT****⊕ TPP 150**

- Medical safety approval
- 12 to 48 VDC (adj.)
- Protection class I & II
- 4.6" x 2.4" x 1.9"
- Opt.: DIN-rail, pin con.

**180 WATT****TPI 180A-M**

- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 3" x 2" x 1.3"





**180 WATT****TPI 180-M**

- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 3.6" x 2.44" x 1.5"

**180 WATT****⊕ TPP 180A-M**

- Medical safety approval
- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 3" x 2" x 1.3"

**180 WATT****⊕ TPP 180-M**

- Medical safety approval
- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 3.6" x 2.44" x 1.5"

**200 WATT****TXO 200****NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 4" x 3" x 1.5"

**120–480 WATT****TXH**

- 12 to 48 VDC (adj.)
- Compact low profile
- Screw terminals

**200 WATT****TOP 200**

- 12 to 48 VDC
- Protection class I & II
- Remote On/Off
- 5" x 3" x 1.3"

**200 WATT****TOP 200C**

- 12 to 48 VDC
- Protection class I & II
- Remote On/Off
- 5.5" x 3.5" x 1.5"

**240 WATT****TCI 240****NEW**

- Unique conduction cooled design
- 12 to 48 VDC
- Protection class II
- OVC III
- JST connection
- 4.1" x 2.46" x 1.54"

**250 WATT****⊕ TPP 250A****NEW**

- Medical safety approval
- Ultra compact design
- 12 to 48 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 4" x 2"

**300 WATT****TXO 300****NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 5" x 3" x 1.72"

**300 WATT****TPI 300L-M**

- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 4.6" x 2.44" x 1.3"

**300 WATT****TPI 300-M**

- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 4.6" x 2.4" x 2.32"

**300 WATT****⊕ TPP 300A-M**

- Medical safety approval
- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 4" x 2" x 1.3"

**300 WATT****⊕ TPP 300-M**

- Medical safety approval
- Ultra compact design
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 4.6" x 2.4" x 2.32"

**450 WATT****⊕ TPP 450BA**

- Medical safety approval
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 5" x 3" x 1.6"
- 12 VDC auxiliary output for fan

**450 WATT****⊕ TPP 450**

- Medical safety approval
- 12 to 53 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 5.8" x 3.2" x 1.6"
- Fan

**500 WATT****TXO 500****NEW**

- Cost optimized design
- 12 to 48 Vout (adj.)
- Protection class II
- JST connection
- 6" x 4" x 1.52"

**500 WATT****TCI 500****NEW**

- Unique conduction cooled design
- 12 to 48 VDC
- Protection class II
- OVC III
- JST connection
- 5.1" x 3.26" x 2.45"

**500 WATT****TCI 500-U****NEW**

- Unique conduction cooled design
- 12 to 48 VDC
- Protection class II
- OVC III
- JST connection
- 5.1" x 3.26" x 1.57"

**600 WATT****⊕ TPP 600A****NEW**

- Medical safety approval
- Ultra compact design
- 24 to 48 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 5" x 3" x 1.5"

**850 WATT****⊕ TPP 850L****NEW**

- Medical safety approval
- Ultra compact design
- 24 to 48 VDC (adj.)
- Protection class I & II
- Contr. & monitor signals
- 6" x 4" x 1.5"



## Outdoor Power Supply

- Rugged power supplies for harsh outdoor environments
- Connection via waterproof I/O plug connectors
- Dust, water (incl. salt water), ice and oil resistant enclosure

### 120 WATT

### TEX 120

- IP67 and NEMA 4X rated
- 12 / 24 VDC output
- Ind. EMC immunity
- Extensive safety approval package (incl. UL 508 / ATEX IEC/EN 61010-1 and more)



## DIN-Rail Power Supplies | 6–600 Watt

- Universal input (85–264 VAC)
- EN 55032 class B filter
- 3-Phase input for TSP 3P models
- International safety approval package including IEC/EN/UL 62368-1 and UL 508

### 15–60 WATT

### TMP-C

- Fully encapsulated
- 5.0 to 48 VDC
- Single, dual, triple
- Low profile



### 15–150 WATT

### TBL

- Low profile plastic casing
- 5.0 to 24 VDC
- NEC class II (up to 90 W)
- DC-OK signal



### 6–90 WATT

### TBLC

- Low profile plastic casing
- 5.0 to 24 VDC
- High efficiency
- ErP-ready
- UL 1310 (NEC class II)
- EN 60335-1 (household)



### 24–240 WATT

### TCL

- Slim plastic casing
- 5.0 to 48 VDC adjust.
- Screw or spring clamp connection
- DC-OK signal



### 30–120 WATT

### TPC

- Robust plastic casing
- 5.0 to 48 VDC adjust.
- ErP-ready
- DC-OK signal



### 80–480 WATT

### TIB

- Rugged metal casing
- Cost optimized design
- 12, 24, 48 VDC output
- High efficiency
- Active PFC
- Alternative side mounting



### 80–480 WATT

### TIB-EX

- UL HazLoc Class I, division 2 and ATEX certification
- Rugged metal casing
- 12, 24, 48 VDC output
- Cost optimized design
- High efficiency
- Active PFC



### 50–480 WATT

### TSPC

- Rugged metal casing
- 12 to 48 VDC adjust.
- IECEx / ATEX
- DC-OK signal



### 72–600 WATT

### TSP

- Rugged metal casing
- 12 to 48 VDC adjust.
- ATEX (opt.) approval
- Entire control signals



### 180–600 WATT

### TSP-WR

- Rugged metal casing
- 24 VDC adjust
- Wide input ranges 100/230–500 VAC
- Entire control signals



## UPS Systems and Function Modules (DIN-Rail and Industrial Cabinets) | 72–600 Watt

- System modules for Charging, Buffering, Power-sharing, Redundancy, Oring or Freewheeling
- Modules with battery interfaces providing fully integrated fail save DC power solutions (UPS)
- Solutions for further upgrading TRACO POWER power supplies or function modules

### UPS SYSTEM

#### 240 WATT TSPC 240UPS

- Power Supply with integrated Battery management module
- 24 VDC output, tightly reg. also in power fail mode
- Use with 12 VDC battery



### BATTERY CONTROLLER MODULES

#### 360 WATT TSP-BCMU360

- Universal module
- For 24 & 48 VDC, tightly reg. also in power fail mode
- Use with 12 VDC battery
- No remote link to PS
- Also for redundant operation



#### 72–600 WATT TSP-BCM

- TSP Series access & module
- For 12, 24, 48 VDC models



#### 240 WATT TIB-BCMU240 NEW

- Universal module
- For 24 VDC, tightly reg. also in power fail mode
- Use with 24 VDC battery
- No remote link to PS
- For redundant operation



### BUFFER MODULE

#### 600 WATT TSP-BFM

- Universal module
- For any 24 VDC source
- 120 Ws buffer energy
- No batteries
- No remote link to PS



### REDUNDANCY MODULES

#### 240 WATT TPC-REM

- TPC series access modules
- Active current sharing
- For 24 or 48 VDC models
- 2 Inputs, 240 W
- DC-OK signal output
- Robust plastic casing



#### 480 WATT TIB-REM480 NEW

- Redundancy module
- For 12–54 VDC
- 2 inputs, 20 A nom.
- >99% efficiency
- No remote link to PS
- Convection cooled



#### 240 WATT TCL-REM

- Redundancy module
- For 5–60 VDC
- 2 × 5 A–10 A out max.
- No remote link to PS (no signal outputs)
- Slim plastic casing



#### 360–600 WATT TSP-REM

- TSP series access modules
- Active current sharing
- For 24 VDC, 2 inputs
- Alarm signal
- Remote On/Off
- Rugged metal casing



**Notes**

[illegible]

TRACO POWER dedicated to design and production of high quality, state-of-the-art DC/DC & AC/DC power conversion products. Our mission is to provide optimal power supply solutions for specific applications with regard to performance, quality, cost and functionality.

TRACO POWER stocks an average of USD 25+ million in available finished goods inventory for immediate shipment through our distribution partners.

TRACO POWER offers extended product life-cycles, typically 10+ years, and our products are supported by a 3 or 5 year product warranty. We understand our customers require a high quality solution as well as a diverse product offering, availability from stock, extended life-cycles and a strong commitment to quality in the form of extended warranty to support their business.

## Our other selection guides / catalogues

### Medical Power Solutions



### Railway Power Solutions



### Industrial Power Solutions



### Household / Building Technology



#### International Office

Traco Electronic AG  
Sihlbruggstrasse 111  
6340 Baar  
Switzerland

P +41 43 311 45 11  
F +41 43 311 45 45  
info@tracopower.com

#### German Office

Traco Electronic GmbH  
Oskar-Messter-Str. 20a  
85737 Ismaning/München  
Germany

P +49 89 96 11 82-0  
F +49 89 96 11 82-20  
info@tracopower.de

#### French Office

Traco Power France  
2 rue du nouveau bercy  
Bâtiment Le Levant  
94220 Charenton Le Pont  
France

P +33 (0)9 70 66 76 74  
info@tracopower.fr

#### North America Office

Traco Power North America, Inc.  
2025 Gateway Place #330  
SAN JOSE, CA 95110  
USA

P +1 (408) 916-4570  
F +1 (408) 916-4571  
salesusa@tracopower.com

#### Design & Development

Traco Power Solutions Ltd.  
Whitemill Industrial Estate  
Whitemill Road, Wexford  
Y35 YH66, Ireland

P +353 53 9167 700  
F +353 53 9167 701  
info@tracopower.ie